



ROITHNER LASERTECHNIK GmbH

WIEDNER HAUPTSTRASSE 76
TEL. +43 1 586 52 43 -0. FAX. -44

1040 VIENNA
OFFICE@ROITHNER-LASER.COM

AUSTRIA



ADL-52101SM

- Green APC Laser Diode
- Automatic Power Control (APC)
- 520 nm, 10 mW
- Modulation Bandwidth < 2 MHz
- Supply Voltage 6 VDC
- TO33 Package, Flat Window



Description



ADL-52101SM is a green laser diode, typically emitting at 520 nm with an output power of 10 mW, and a modulation bandwidth of up to 2 MHz (PWM). It features an **integrated automatic power control (APC) driver** and can be operated through a 6 VDC voltage source. **ADL-52101SM** comes in 3.3 mm TO-Can package with flat glass window.

Maximum Ratings*

Parameter	Symbol	Values		Unit
		Min.	Max.	
Power Supply Voltage	U_{CC}	6.0	7.0	V
Optical Output Power	P_O		10	mW
Operating Temperature*	T_{OPR}	- 10	+ 50	°C
Storage Temperature*	T_{STG}	- 40	+ 85	°C
Soldering Temperature (t _{max.} 3s)	T_{SOL}		+ 260	°C

* operation close to or outside these parameters may damage the device

Electro-Optical Characteristics (T_C = 25°C, P_O = 10 mW, U_{CC} = 6V)

Parameter	Symbol	Values			Unit
		Min.	Typ.	Max.	
Peak Wavelength	λ_P	510	520	530	nm
Power Variation	ΔP_O	-10		+10	%
Power/Temperature Variation (-10 ... 50 °C)	ΔP_{OT}	-15		+10	%
Power/Supply Voltage Variation (5.8...7.0 V)	ΔP_{OU}	-15		+10	%
Current Draw	I_{CC}		70	100	mA
Chip Positioning Accuracy	$\Delta X, \Delta Y, \Delta Z,$	-80		+80	µm
Beam Divergence (FWHM)	parallel	Θ_{II}	3	7	deg.
	perpendicular	Θ_{\perp}	15	23	deg.
Beam Deviation	parallel	$\Delta\Theta_{II}$	-5		deg.
	perpendicular	$\Delta\Theta_{\perp}$	-5		deg.
Bandwidth (PWM, duty cycle = 50%)	f_M	100		2000	KHz

Safety Advice

Laser light emitted from any laser diode may be harmful to the human eye. **Avoid looking directly into the laser diode's aperture.** The use of optical lenses will increase eye hazard





ROITHNER LASERTECHNIK GmbH


WIEDNER HAUPTSTRASSE 76
TEL. +43 1 586 52 43 -0, FAX. -44

1040 VIENNA AUSTRIA
OFFICE@ROITHNER-LASER.COM




Typical Performance Curves


Output Power vs. Supply Voltage

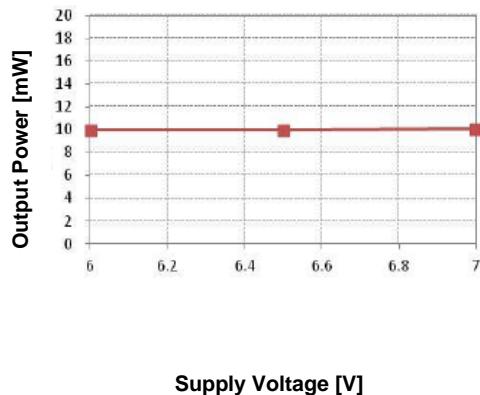


Current Draw vs. Supply Voltage

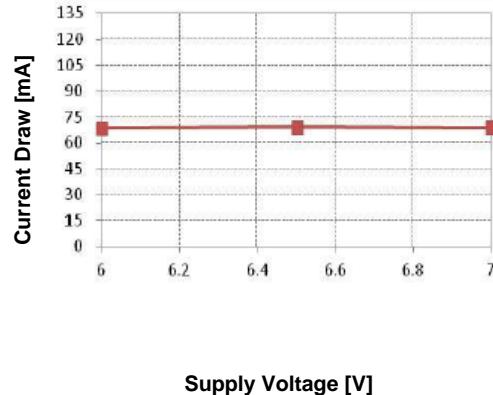

Output Power vs. Temperature

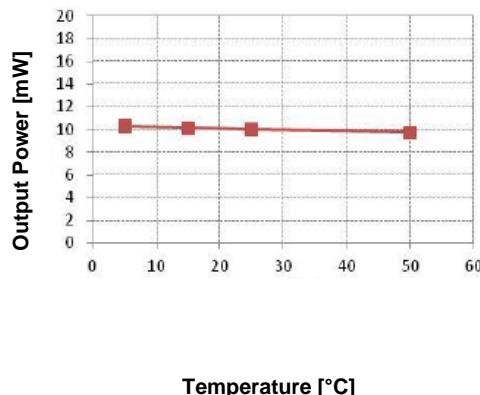

Current Draw vs. Temperature

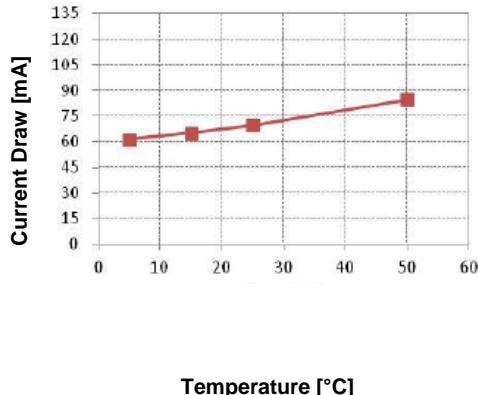




ROITHNER LASERTECHNIK GmbH

WIEDNER HAUPTSTRASSE 76
TEL. +43 1 586 52 43 -0. FAX. -44


1040 VIENNA AUSTRIA
OFFICE@ROITHNER-LASER.COM



Electrical Connection

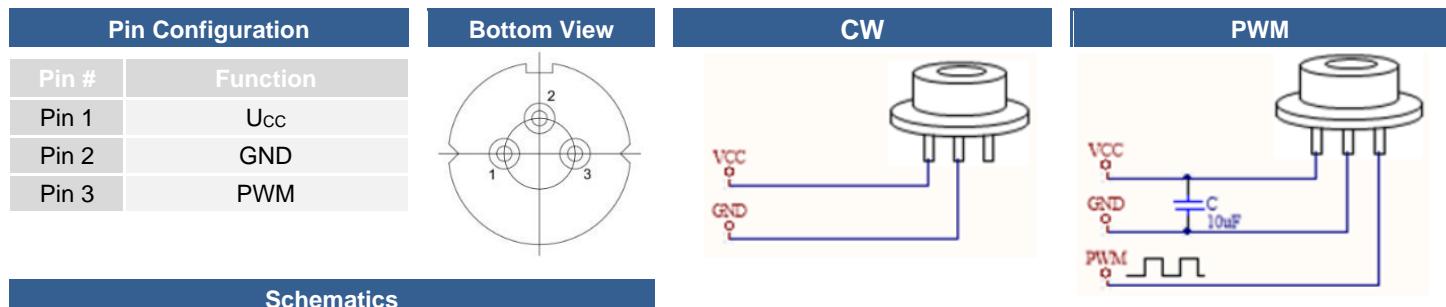


Schematics

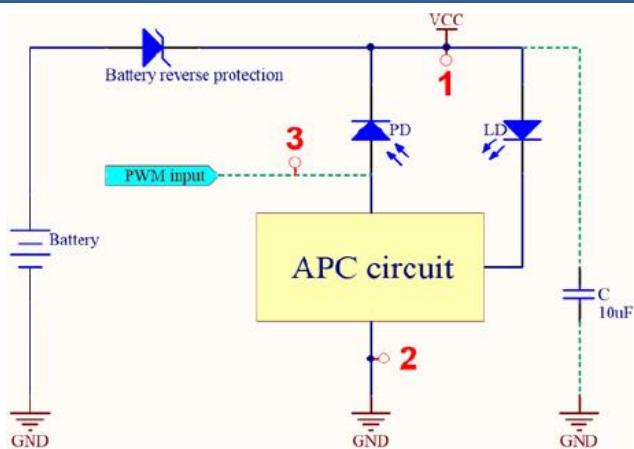

- No external driver required
- APC driver IC integrated into the TO-Can
- 10 μ F capacitor recommended for PWM operation
- Battery reverse protection recommended
- 1 μ F capacitor recommended for low power operation (<50%)

Outline Dimensions

TO33

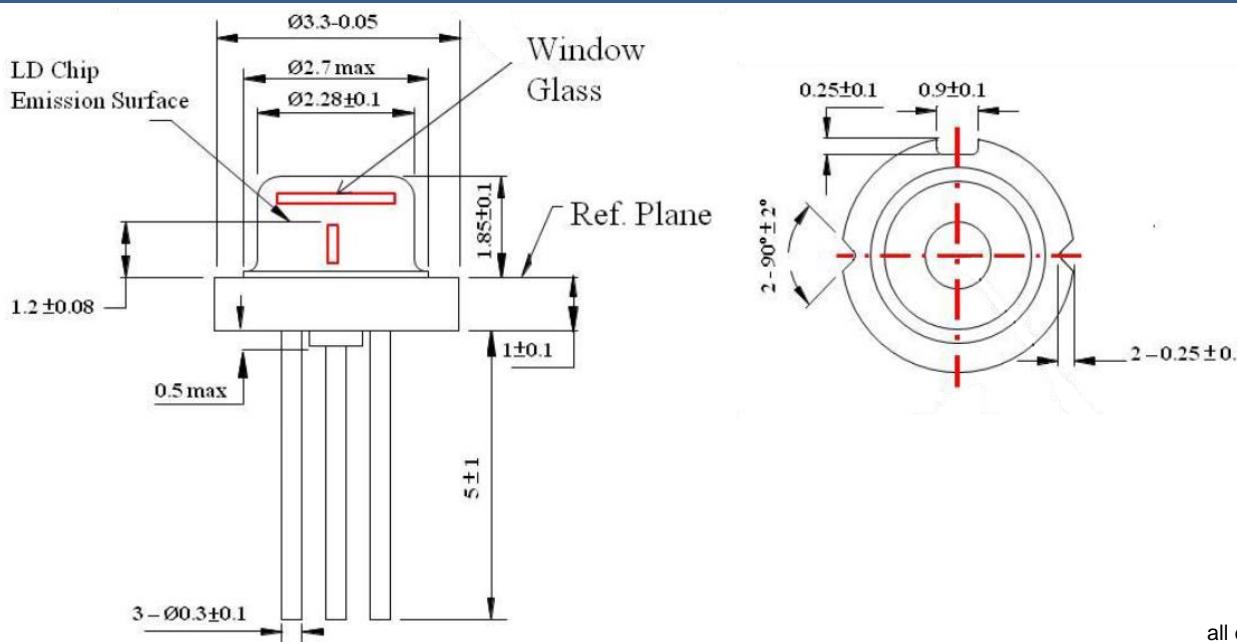

all dimensions in mm