



ROITHNER LASERTECHNIK GmbH


WIEDNER HAUPTSTRASSE 76
TEL. +43 1 586 52 43 -O, FAX. -44

1040 VIENNA AUSTRIA
OFFICE@ROITHNER-LASER.COM



CW473H

- Blue Diode Pumped Laser Module
- 473 nm, 1-50 mW
- 3 VDC
- CE certified



Description

CW473H is a series of **blue** diode pumped solid-state laser modules, typically emitting at **473 nm**, with 3 VDC supply voltage. It is RoHS compliant, CE certified, and comes with a **6 months warranty**. An additional external heat sink is required for operation

Electro-Optical Characteristics

Parameter	Values	Unit
Wavelength	473	nm
Output Power	1...50	mW
Operating Mode	CW	
Transverse Mode	TEM ₀₀	
Beam Divergence (full angle)	~ 1.5	mrاد
Beam Diameter at the aperture (1/e ²)	~ 1.5	mm
Operating Temperature	10 - 25	°C
Supply Voltage*	3	VDC
Current Draw	<1 (10mW), <2 (20-50mW)	A
Expected Lifetime	10000	hours

* Housing electrically connected to + 3 VDC

LASER RADIATION
AVOID EXPOSURE TO BEAM
CLASS 3B LASER PRODUCT

Outline Dimensions


Laser module





Accessories

Heat Sink CWH-HSTEC5

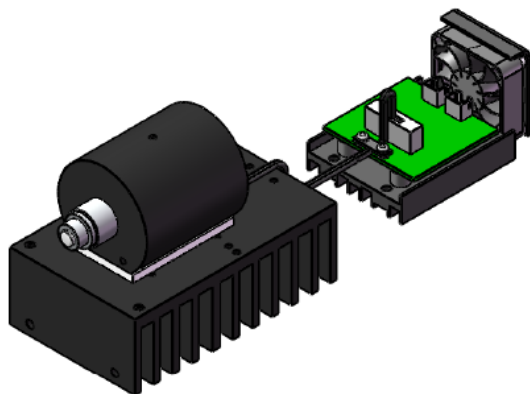

- Temperature controlled heat sink
- 5 VDC
- TEC
- Thermistor
- Fan

© All Rights Reserved

The above specifications are for reference purpose only and subjected to change without prior notice