



ROITHNER LASERTECHNIK GmbH

WIEDNER HAUPTSTRASSE 76
TEL. +43 1 586 52 43 -0, FAX. -44

1040 VIENNA AUSTRIA
OFFICE@ROITHNER-LASER.COM



RLDH635M-4-5

- Red Laser Diode Module
- 635 nm, 4 mW
- **TTL Modulation <500 kHz**
- Focusable AR coated Glass Lens
- Automatic Power Control (APC)



Description

RLDH635M-4-5 is a red modifiable diode laser module, emitting at a wavelength of typically **635 nm**, with an optical output power of **4 mW**, and **TTL modulation capability of <500 kHz**. It features **AR coated glass lens** for superior beam quality, and automatic power control (**APC**) for stable performance. **RLDH635M-4-5** is designed for 5 VDC supply voltage (adapter available, page 2), and comes with IEC 60130-10 connector. A leads only variant without connector is available on request.

Maximum Ratings*

Parameter	Values		Unit
	Min.	Max.	
Operating temperature	- 10	+ 40	°C
Storage temperature	- 40	+ 80	°C

*Operating close to or exceeding these parameters may damage the device

Electro-Optical Characteristics (T_{CASE} = 25°C)

Parameter	Min.	Values		Unit
		Typ.	Max.	
Peak Wavelength		635		nm
Optical Output Power		4		mW
TTL modulation			500	kHz
Output Aperture (diameter)		5		mm
Beam Shape	elliptical			
Divergence		1.5		mrad
Supply Voltage		5		VDC
Operating Current		40		mA
Body	Aluminium, black anodized			
Lens	Glass, AR coated (both sides)			
Connector	IEC 60130-10 (Type A, 5.5/2.1 mm)			
Dimensions	Ø 12 x 34			mm
MTTF (@25°C)	8000			h





ROITHNER LASERTECHNIK GmbH

WIEDNER HAUPTSTRASSE 76
TEL. +43 1 586 52 43 -O. FAX. -44


1040 VIENNA AUSTRIA
OFFICE@ROITHNER-LASER.COM




Outline / Connector

Module

IEC 60130-10 Connector, Type A, 5.5/2.1 mm

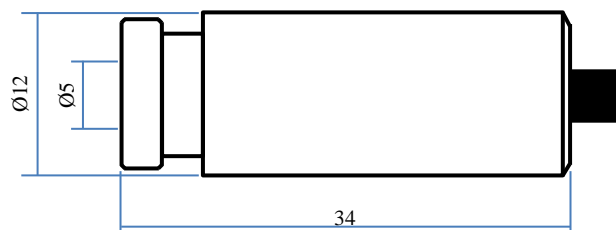

all dimensions in mm

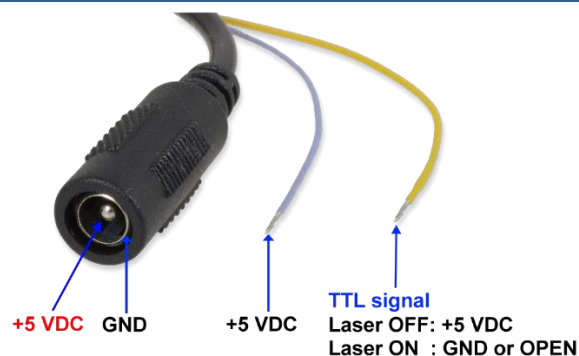

TTL signal
Laser OFF: +5 VDC
Laser ON : GND or OPEN

Optional Accessories

Adapter LPS51C

- 100-240VAC
- AC Europlug (CEE7/16)
- IEC 60130-10 Type A con.
- Output 3 VDC, max 1 A
- CE certified
- 30 x 80 x 75 mm
- 80 g



Holder RLM-1250

- Steel, black anodized
- Height, reach, tilt adjustable
- Fixture 360° turnable
- Max. diameter: 12.5 mm
- 69 x 67 mm
- 152 g



Precautions

Static Electricity:

Precautions against electrostatic discharge (ESD) must be taken when handling or operating the module. Surge voltage or electrostatic discharge can result in complete failure of the laser module.

Heat Sinking:

In order to maintain lifetime and stability of the laser module, efficient heat management is recommended.

Safety:

This laser module emits highly concentrated light which can be **hazardous to the human eye and skin**. It is classified as **CLASS 3R laser product** according to **IEC 60825-1** and **21 CFR Part 1040.10 Safety Standards**.



© All Rights Reserved

The above specifications are for reference purpose only and subjected to change without prior notice