




ELC-800-25

Radiation	Type	Electrodes
Infrared	AlGaAs/AlGaAs, DDH	N (cathode) up

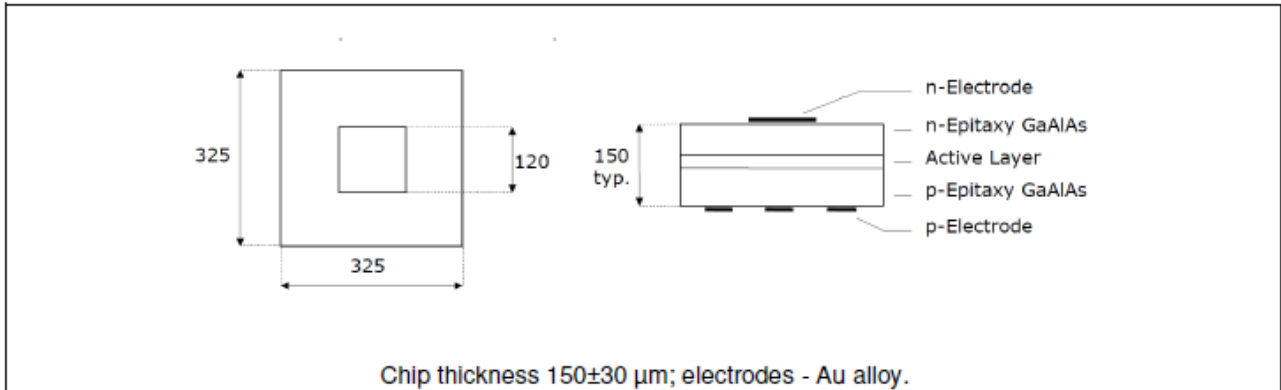

Optical and Electrical Characteristics

$T_{amb} = 25^{\circ}\text{C}$, unless otherwise specified

Parameter	Test cond.	Symbol	Min	Typ	Max	Unit
Forward voltage	$I_F = 20 \text{ mA}$	V_F		1.55	1.8	V
Reverse current	$V_R = 5 \text{ V}$	I_R			10	µA
Radiant power*	$I_F = 20 \text{ mA}$	Φ_e	3	4		mW
Peak wavelength	$I_F = 20 \text{ mA}$	λ_p	790	800	810	nm
FWHM	$I_F = 20 \text{ mA}$	$\Delta\lambda_{0.5}$		29		nm
Switching time	$I_F = 20 \text{ mA}$	t_r, t_f		40; 30		ns

*Measured on bare chip on TO-18 header

Packing

Chips on adhesive film with wire bond side up



We reserve the right to make changes to improve technical design and may do so without further notice. Parameters can vary in different applications. All operating parameters must be validated for each customer application by the customer.