



RLDB808-500-5

- Infrared Diode Laser Module
- 808 nm, 500 mW
- Focus Adjustable
- Dimension: Ø45 x 120 mm

Description




RLDB808 series of Diode Laser Modules has been designed as a small housing laser module solution. The modules body is made of black anodized aluminum, enclosing laser diode, lens, and driving electronics. RLDB808 series features a **focusable glass lens optic** with a locking mechanism and **incorporated 5 VDC driver** circuit.

Specifications

Parameter	Min.	Values Typ.	Max.	Unit
Peak Wavelength		808		nm
Optical Output Power		500		mW
Laser Class		3B		
Operating Voltage		DC 5		V
Operating Current		1	3	A
Control		APC		
Standard Operating Distance		10		m
Focus		Adjustable		
Beam Character		Elliptical, Strip		
Elliptic Proportion	1:2.5			
Output Aperture		Ø6		mm
Divergence		1.0		mrad
Optic		Glass lens, both sides AR coated		
Operating Temperature	-10		+40	°C
Storage Temperature	-40		+80	°C
Life Time	8000			hours
Material		black anodized aluminum		
Electrical Connection		connector plug		
Dimension (Dia. x W)		Ø45 x 120		mm
Weight		280		g



Outline Dimensions

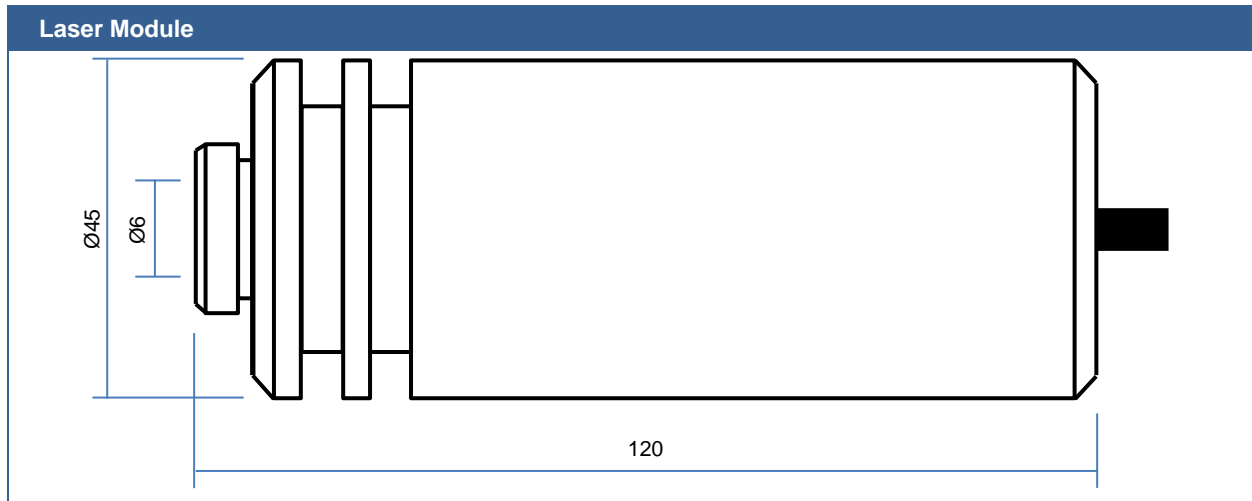

All Dimensions in mm

Electrical Connection



Precautions

Mounting Instruction:

In order to maintain lifetime and stability of the laser diode it is essential to provide efficient heat management. For long time stable operation proper contact between laser module and heat sink is mandatory.

Safety Advice:

This laser module emits highly concentrated visible light which can be **hazardous to the human eye and skin**. It is classified as **CLASS 3B laser product** according to **IEC 60825-1** and **21 CFR Part 1040.10 Safety Standards**. Actual laser light emitted and precautions necessary strongly depend on mode of operation.